
Clove Wall Hook

DESIGNED IN 2022

ASSEMBLY NOTES | REV 00



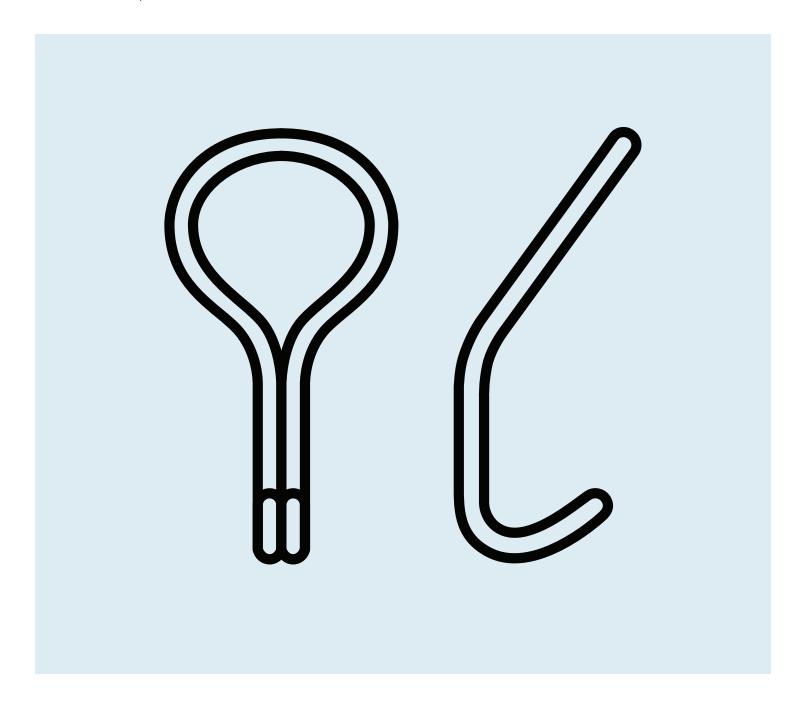


NEED A HAND?


Contact us at **service@bludot.com** or **844.425.8368** for assistance.

@BLUDOT

We design all our pieces in our Minneapolis studio. Follow along on Instagram for some sneak peeks into the process.

Parts & Hardware

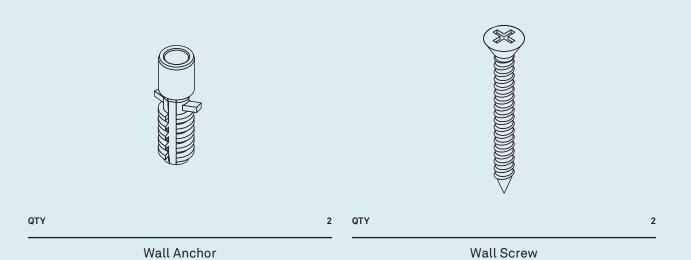

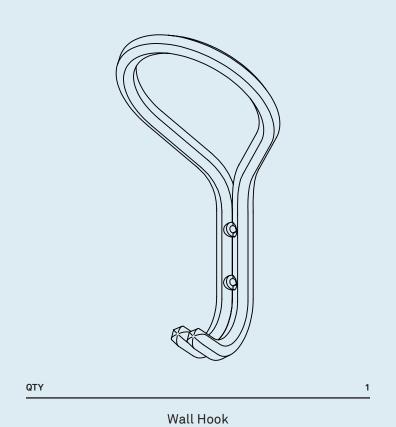

1 | 844.425.8368 CLOVE WALL HOOK

Step 01

INSTALL WALL HOOK

Wall anchors and fasteners are included for installation. Please consult your local hardware professional to determine the hardware best suited for your wall type.

Position the hook in the desired location and orientation, then mark the mounting locations.

The small and large sizes of the wall hook come with different wall anchor and screw sizes. Carefully follow instructions below to ensure proper installation.

For SMALL wall hooks:


If the mounting location is not positioned on a stud, drill a 3/16" hole in the marked location and insert wall anchor. If the mounting location is located on a stud, this step of installing an anchor may be skipped. Instead, drill a 3/32" pilot hole in the marked position.

OR

For **LARGE** wall hooks:

If the mounting location is not positioned on a stud, drill a **7/32**" hole in the marked location and insert wall anchor. If the mounting location is located on a stud, this step of installing an anchor may be skipped. Instead, drill a **7/64**" pilot hole in the marked position.

Attach wall hook using provided wall screw to complete installation.

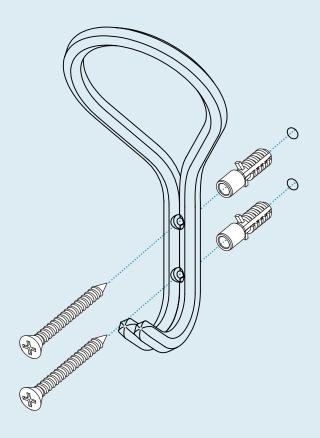



ASSEMBLY NOTES SERVICE@BLUDOT.COM | 2

Additional Information NOTE 15 lbs maximum weight capacity on hook. CLEAN Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated

for painted metal furniture. Wipe completely dry with a soft cloth.