
Dang Collection

DESIGNED IN 2016

ASSEMBLY NOTES | REV 01



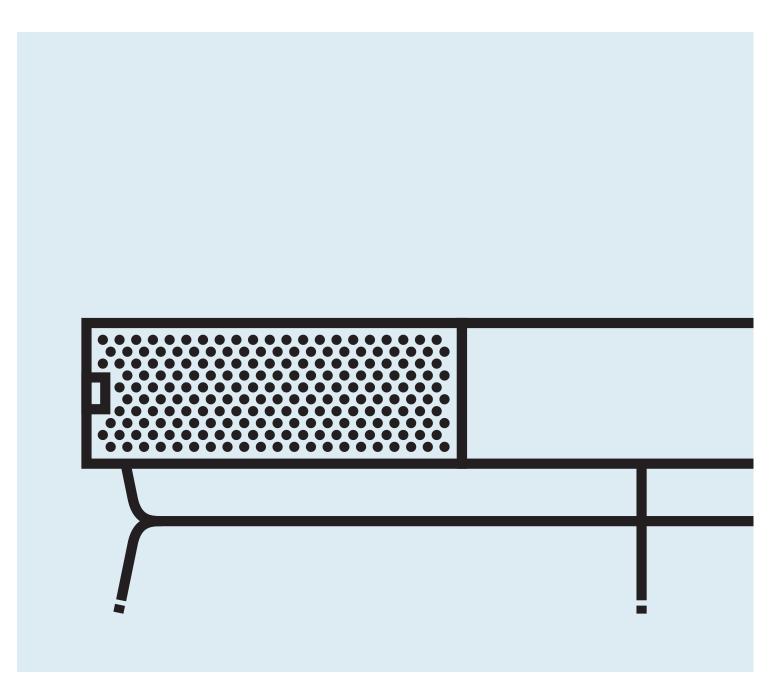


ALMOST SEEMS A SHAME TO MUCK IT UP WITH A TV.

Perforated steel door fronts allow use of remotes without spoiling the view. Brass details and powder-coated steel base.

NEED A HAND?


Contact us at **service@bludot.com** or **844.425.8368** for assistance.

Parts & Hardware

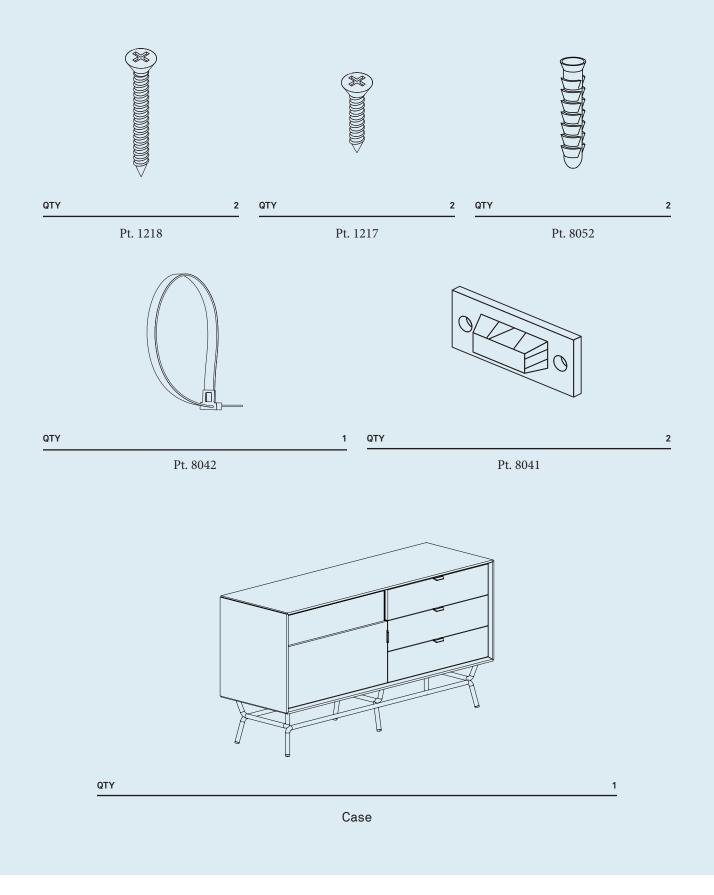

DOOR ADJUSTMENT.

Hinges work in pairs. If you adjust one hinge, chances are you will have to adjust all the hinges.

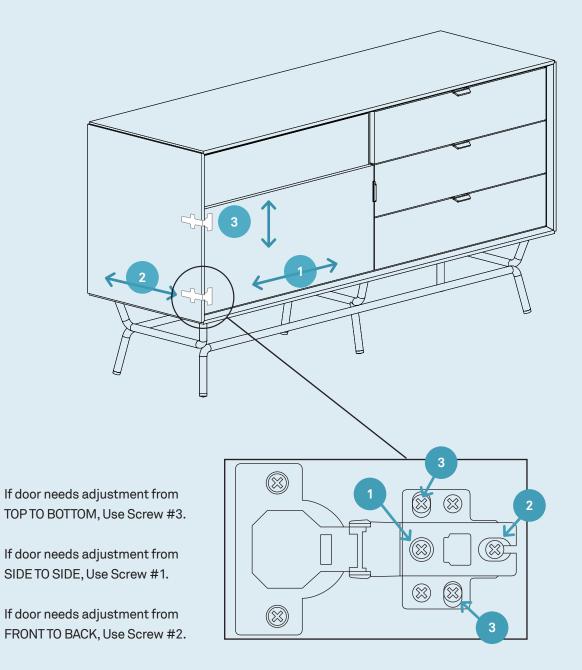



INSTALL WALL ANCHORS.

Wall anchors and fasteners are included for installation into drywall. Please consult your local hardware professional to determine the hardware best suited for your wall type.

If the mounting locations are not positioned on a stud, drill **5/16**" holes in the marked locations. Press wall anchors into drilled holes.

If the mounting locations are positioned on a stud, this step of installing wall anchors may be skipped. Instead, drill **7/64**" pilot holes in the marked positions.




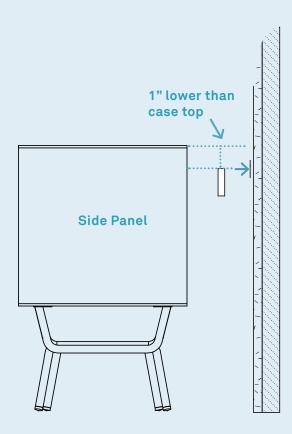


PT. 8052 x 2

ATTACH ANTI-TIP BRACKET TO THE WALL.


Install anti-tip bracket to wall stud 1-inch below case top panel height.

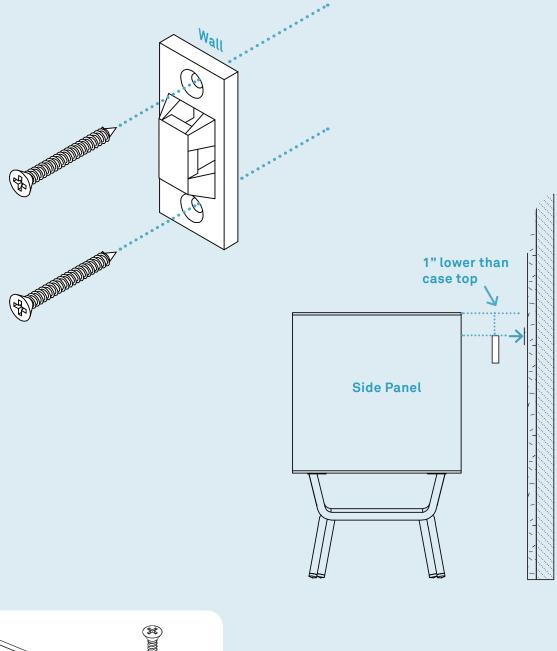





INSTALL ANTI-TIP BRACKET TO CASE.

Bracket must be installed to top panel of case. In order to prevent damage, it is recommended that 3/32" pilot holes be drilled prior to installation.



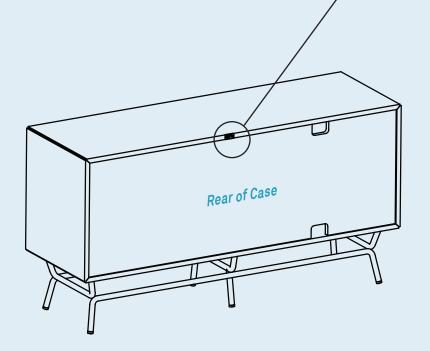






SECURE THE CASE.

Install and tighten the strap prior to using the product.

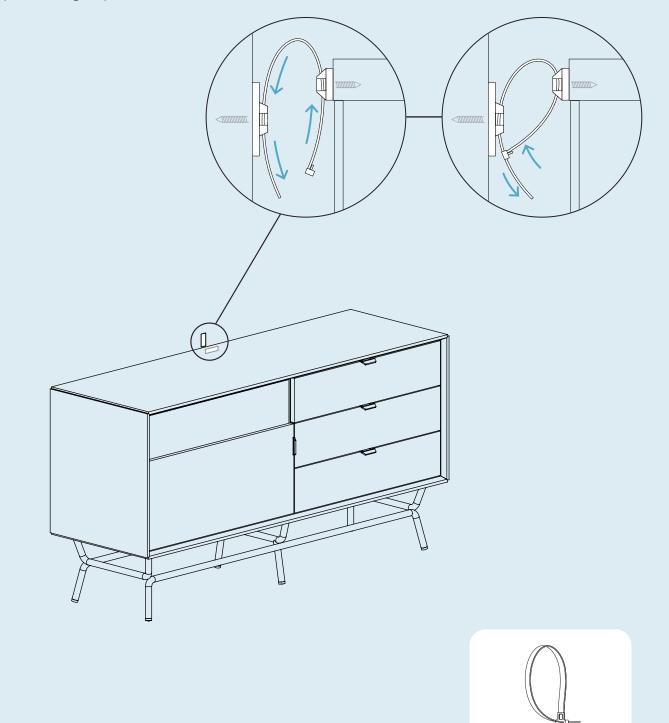

Pt. 8042 X 1

Additional Information

CLEAN

Clean with a slightly damp, soft cloth. To remove dirt and fingerprints, use a quality cleaner formulated for wood furniture. Wipe completely dry with a soft cloth in the direction of the wood grain.

