
# Sunday Sectional Sofa

DESIGNED IN 2016

ASSEMBLY NOTES | REV 01



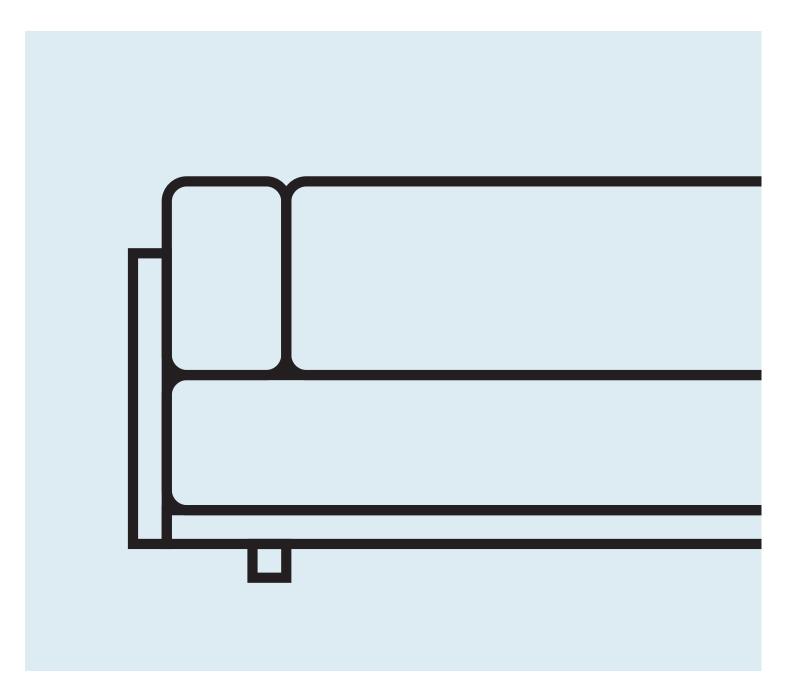


SLOTH GETS A BAD RAP.


Sure, you can multitask on Sunday. But why, when you can just melt instead?

NEED A HAND?

Contact us at **service@bludot.com** or **844.425.8368** for assistance.

### Parts & Hardware

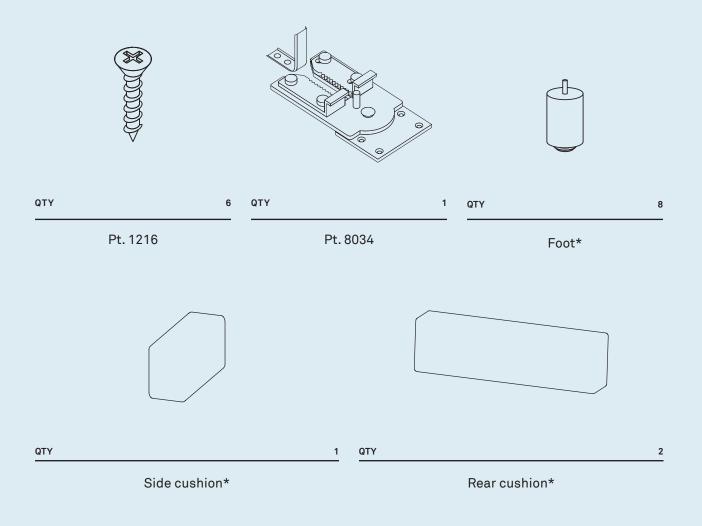

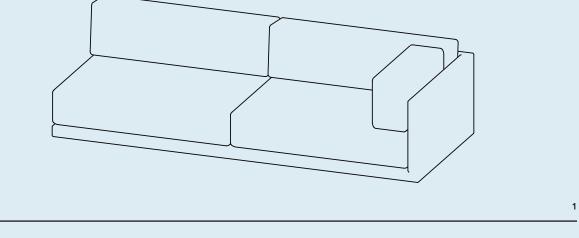

Sectional

\*foot and cushion quantity vary based on product. Refer to page 2 for part breakdown.

QTY

	Foot	Side cushion	Rear cushion
Armless Sofa	4	Ø	1
Chaise	6	1	1
Corner Sofa	6	2	2
One Arm Sofa	8	1	2
Small One Arm Sofa	4	1	1

ATTACH FEET.

 $\mathbf{\hat{o}}$ 

æ

Attach adjustable feet as shown.

Note: After the feet have been attached, have a second person help lift and bring the sofa upright in order to prevent foot damage.

8

Ð


Ð

Ð


S.


ATTACH MALE SECTIONAL CONNECTOR.

This hardware allows proper alignment of the sectional sofas and holds them in place during use.

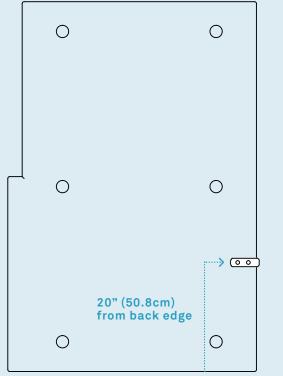


**Underside of Chaise** 

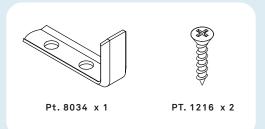

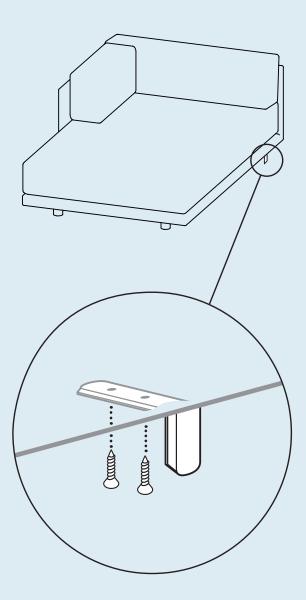


ATTACH FEMALE SECTIONAL CONNECTOR.

This hardware allows proper alignment of the sectional sofas and holds them in place during use.

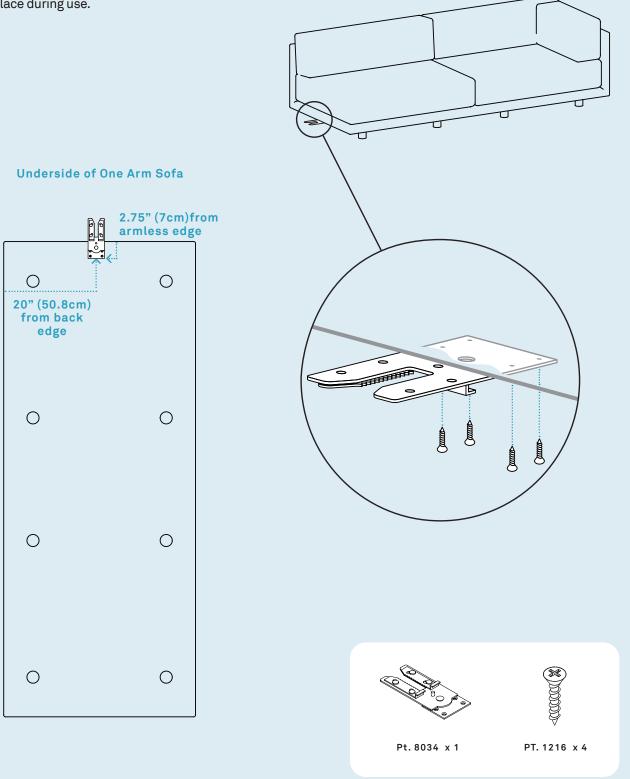

CONNECT SECTIONAL SOFAS.

With back sides aligned, carefully slide sectional sofas together. Make sure sectional connector latches for a secure placement.

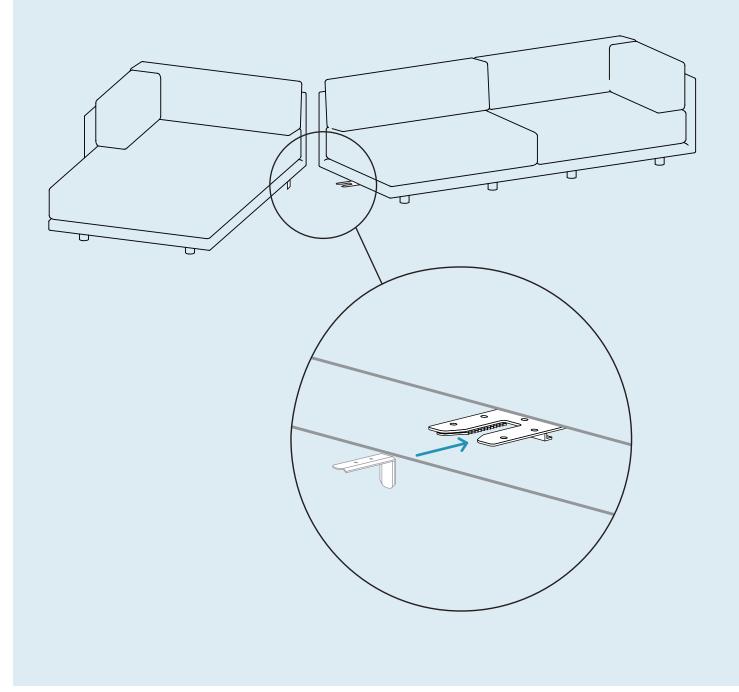

### Additional Information

#### CLEAN

Vacuum your upholstery regularly.

#### SPILLS

Act quickly with spills. Absorb the spill with a clean white cloth or paper towel. Never rub the surface. Do not use water or other liquids to clean, as they may stain the fabric. Consult a commercial cleaning specialist for removal of stubborn stains.

#### AVOID

Keep upholstery & felt furniture out of direct sunlight and away from heat sources; excessive exposure to sunlight may fade the color of the upholstery. Avoid placing heavy or sharp objects on the furniture surface for long periods of time; this can cause permanent indentations in the fabric. For snags in the fabric, tuck loose threads into fabric or carefully push to reverse side. Never pull out or cut off loose threads.

